

PARKITECT®

MODULAR PUMPTRACK ONYX

FLBPT26

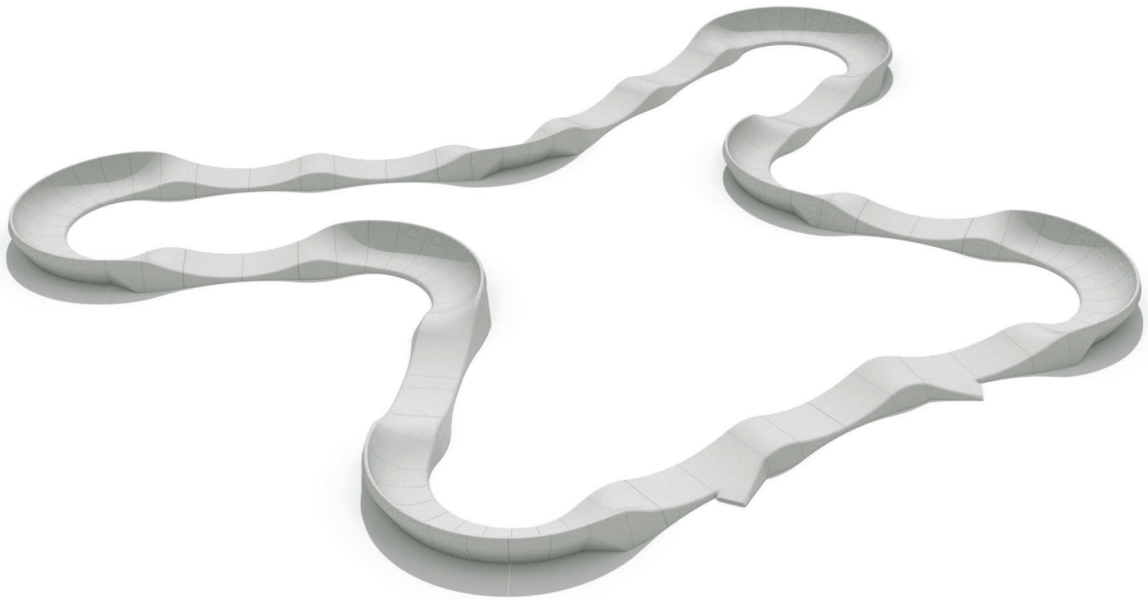

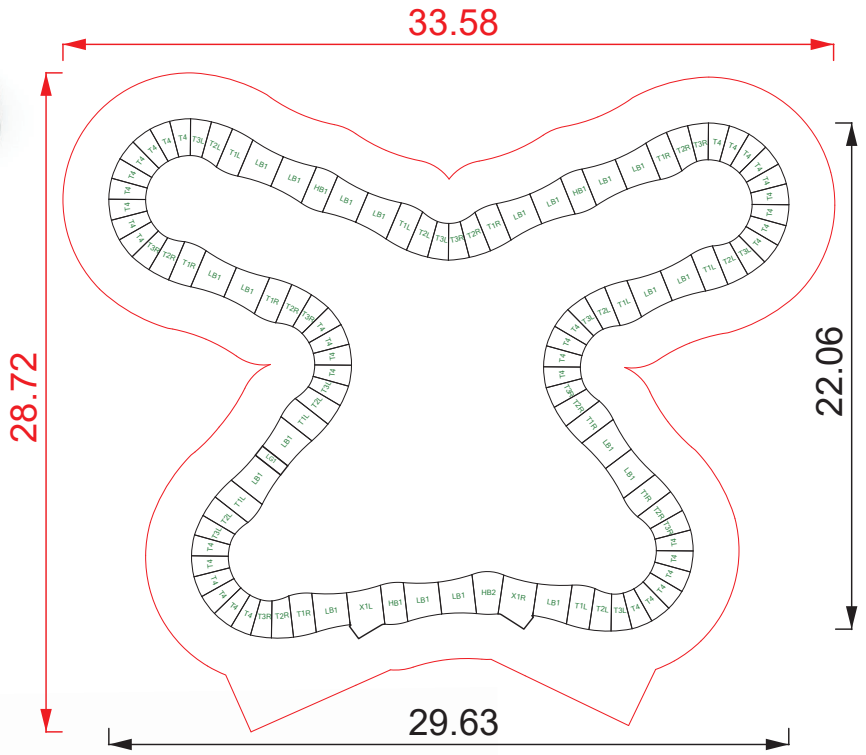

Rideable surface lenght: 102m

MATERIAL:

Element construction:	precast reinforced concrete C35/45
Surface construction:	sandblasted concrete
-alternative:	resin coating / trowel for concrete
Riding surface:	Sika impregnation

CONNECTING MATERIAL:

Connecting bolts: M16 - galvanized, stainless steel (strenght 8.8)
Mounting holes: M16 - part of the shippment (strenght 8.8)

JOINT FILLER :

Flexible sealant SIKA FLEX PRO 3 (change of sealant after the approval of the manufacturer)


CONNECTION COVER:

All connection points must be covered with soil, except for the back-parts of elements T2, T3 and T4.

T1L+R	.....	7+7
T2L+R	.....	7+7
T3L+R	.....	7+7
T4	.....	38
LB1	.....	20
HB1	.....	3
HB2	.....	1
X1+X2L/R	.....	1+1
LG1	.....	1

Colors

Ral 7035 precast

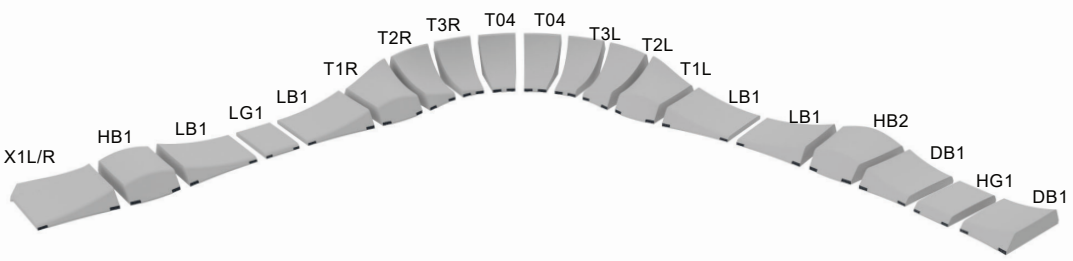

PARKITECT®
Parkitect AG
Reutenenstrasse 22
9042 Speicher, Switzerland
info@parkitect.ch
MWSt - CHE-106.823.064