
TECHNICAL DATA SHEET

# ECO TOWER SLIDE 1500 – WITH STAINLESS STEEL SLIDE

FLFJ016

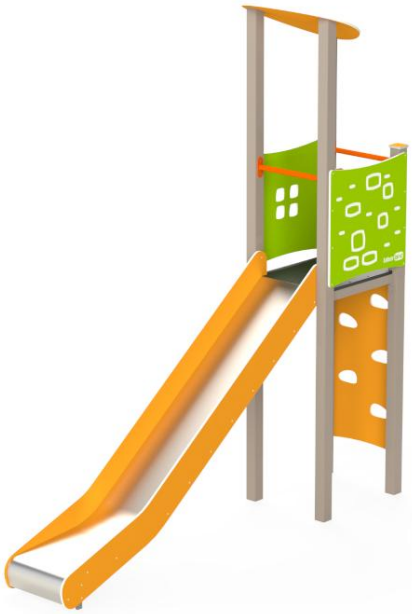

## MAIN PARAMETERS

| | |
|---|---|
| Dimensions | 307 x 84 x 325 cm |
| Safety area | 651 x 369 cm |
| Safety area ($m^2$) | 20 $m^2$ |
| Free fall height (HIC) | 150 cm |
| Recommended age group | 3-14 years |
| Recommended number of users | 3 person |
| Complies with Standards | EN 1176-1<br>EN 1176-3 |
| Platform area | 0,4 $m^2$ |
| Slide platform height | 150 cm |

## FUNCTIONS

| | |
|---|---|
| Tower | 1 pc |
| Slide | 1 pc |
| Climbing wall | 1 pc |



SLIDING



HIDING



INTERACTION




CLIMBING



Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en

TECHNICAL DATA SHEET

# ECO TOWER SLIDE 1500 – WITH STAINLESS STEEL SLIDE

FLFJ016

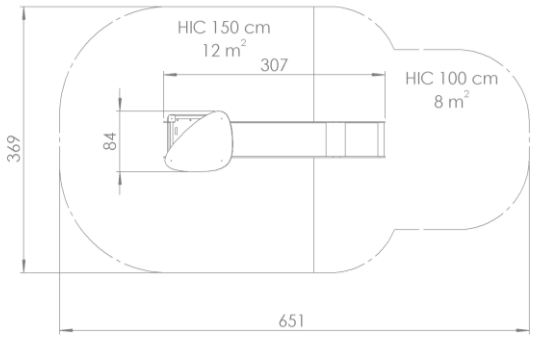


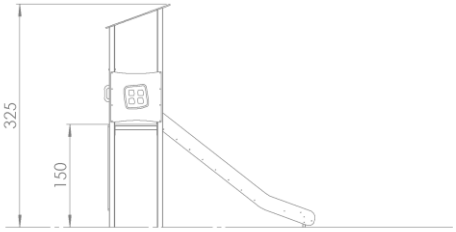
## SAFETY AREA

| | |
|---|---|
| HIC 100 cm | 8 m² |
| HIC 150 cm | 12 m² |
| HIC in Total | 20 m² |

## MATERIAL USAGE



**Construction:** 80 x 80, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



**Bars**: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



**Side panels, rooftops, decorative items:** 15 mm, contour milled, UV resistant HDPE plate.



**Platforms:** 21 mm anti-slip birch plywood.



**Slide: Stainless steel sliding surface, 15 mm UV-resistant HDPE sheet side panels**



**Fasteners:** stainless steel.