TECHNICAL DATA SHEET

ECO TOWER SLIDE 1200 – WITH STAINLESS STEEL SLIDE

FLFJ017



MAIN PARAMETERS

Dimensions	257 x 84 x 300 cm
Safety area	607 x 369 cm
Safety area (m^2)	18,2 m^2
Free fall height (HIC)	120 cm
Recommended age group	3-14 years
Recommended number of users	3 persons
Complies with Standards	EN 1176-1 EN 1176-3
Platform area	0,4 m^2
Slide platform height	120 cm

FUNCTIONS

Tower	1 pc
Slide	1 pc
Ladder	1 pc



SLIDING



HIDING



INTERACTION





CLIMBING

TECHNICAL DATA SHEET

ECO TOWER SLIDE 1200 – WITH STAINLESS STEEL SLIDE

FLFJ017

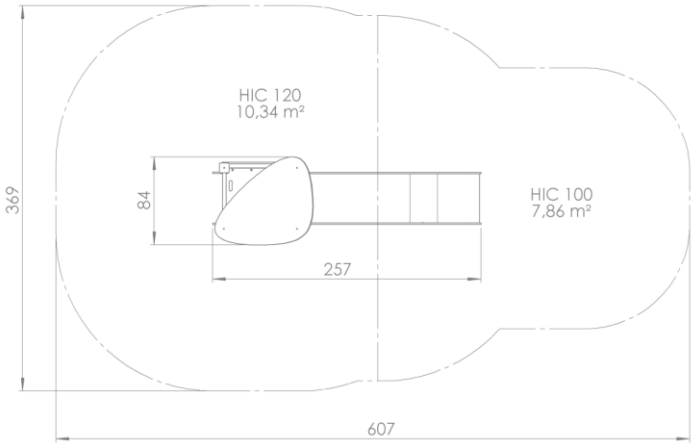


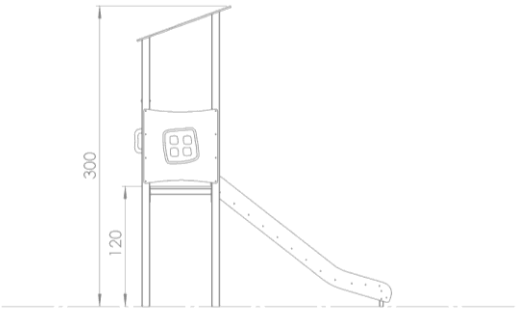

SAFETY AREA

HIC 100 cm	7,86 m²
HIC 120 cm	10,34 m²
HIC in Total	18,2 m²

MATERIAL USAGE



Construction: 80 x 80 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Bars, ladders: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Side panels, rooftops, decorative items: 15 mm, contour milled, UV resistant HDPE plate.



Platforms: 21 mm anti-slip birch plywood.



Slide: Stainless steel sliding surface, 15 mm UV-resistant HDPE sheet side panels



Fasteners: stainless steel.