TECHNICAL DATA SHEET

ECO SLIDE – WITH POLYESTER SLIDE

FLFJ021P



MAIN PARAMETERS

Dimensions	289 x 71 x 242 cm
Falling space	639 x 369 cm
Falling space area (m^2)	19,2 m^2
Free fall height (HIC)	150 cm
Recommended age group	2-12 years
Recommended number of users	2 person
Complies with Standards	EN 1176-1 EN 1176-3
	-

FUNCTIONS


Tower	1 pc
Ladder	1 pc


INTERACTION SLIDING CLIMBING

Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en

ECO SLIDE – WITH POLYESTER SLIDE

FLFJ021P

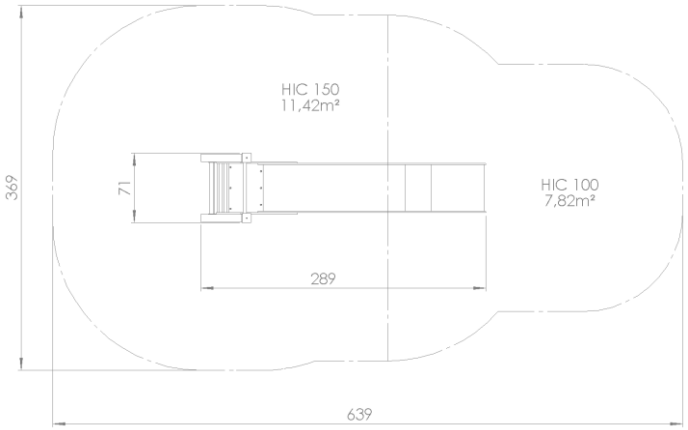


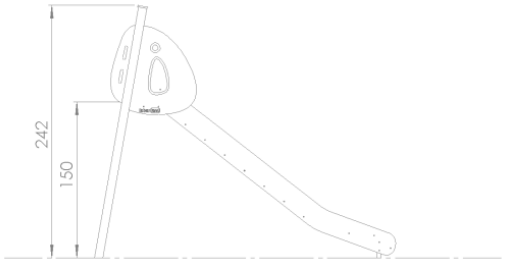

SAFETY AREA

HIC 150 cm	12,5 m²
HIC 100 cm	7,8 m²
HIC in Total	19,2 m²

MATERIAL USAGE



Construction: 80 x 80 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers PE powder coating (60-70 µm per layer).



Side panels, rooftops, decorative items: 15 mm, contour milled, UV resistant HDPE plate.



Bars, ladders: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers PE powder coating (60-70 µm per layer).



Fasteners: stainless steel.



Slide: Polyester sliding surface with 15 mm UV-resistant HDPE sheet side panels.