
TECHNICAL DATA SHEET

SHIP_M - WITH POLYESTER SLIDE

FLFJ834

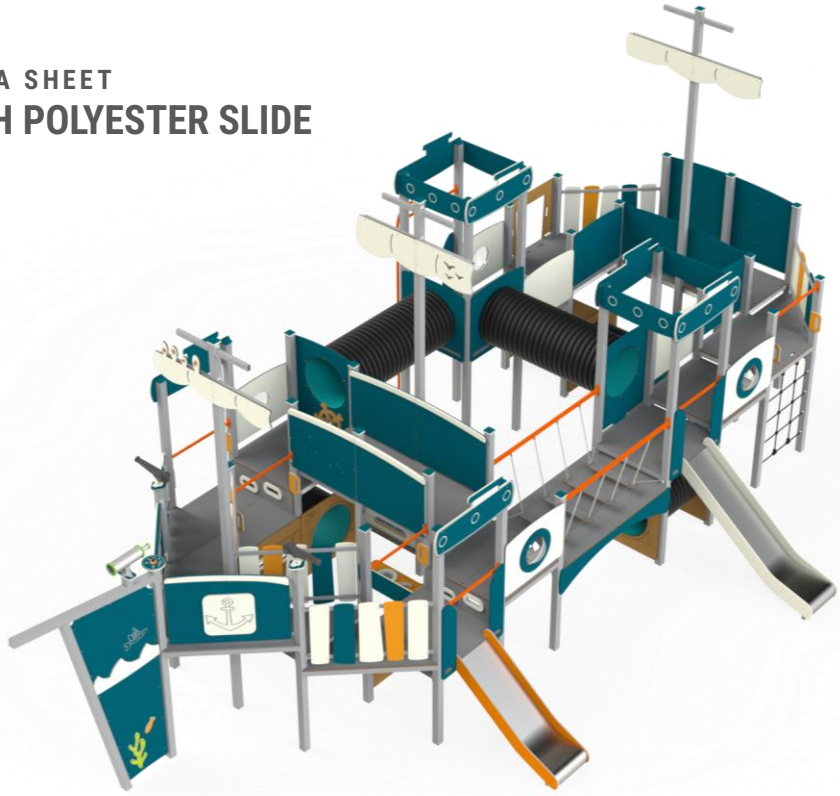

MAIN PARAMETERS

Dimensions	1093 x 601 x 501 cm
Safety area	1105 x 1105 cm
Safety area (m^2)	89,2 m^2
Free fall height (HIC)	150 cm
Recommended age group	3-14 years
Recommended number of users	56 person
Complies with Standards	EN 1176-1 EN 1176-3
Platform area	19 m^2
Slide platform height	120 cm, 90 cm

FUNCTIONS

Tunnel	5 pcs
Slide	2 pcs
Climbing net	1 pc
Climbing rock wall	4 pcs
Chain bridge	1 pc
Fireman's pole	1 pc
Spherical window	4 pcs
Climbing bar	1 pc
Sand table	1 pc
Sand crane	1 pc
Interactive play panel	6 pcs
Telescope	1 pc
Ship's wheel	1 pc

SLIDING HIDING CRAWLING CLIMBING INTERACTION ROLE PLAY


SHAPING BALANCING COOPERATION VISUAL STIMULATION


Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en

TECHNICAL DATA SHEET

SHIP_M - WITH POLYESTER SLIDE

FLFJ834

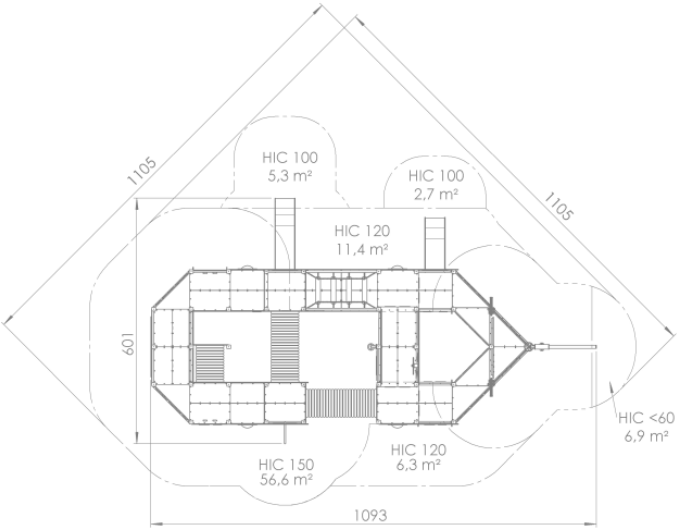


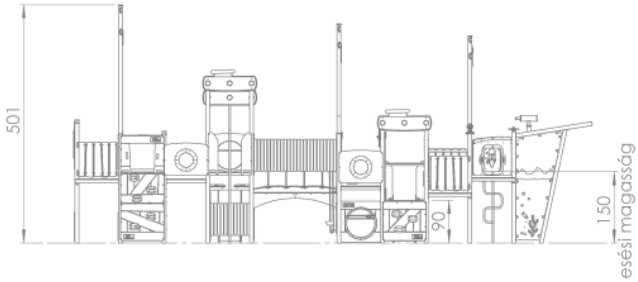

SAFETY AREA

HIC 150 cm	56,6 m²
HIC 120 cm	17,7 m²
HIC 100 cm	8 m²
HIC <60 cm	6,9 m²
HIC in Total	89,2 m²

MATERIAL USAGE




Construction: 80 x 80 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Bars, ladders, fireman's poles: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).




Side panels, rooftops, decorative items: 15 mm, contour milled, UV resistant HDPE plate.



Platforms: 16 mm, UV resistant, anti-slip HDPE plate.



Slide: glass fibre reinforced polyester sliding surface, 15 mm, UV resistant HDPE plate side panels.



Tunnel: plastic (PP D 600 SN8) corrugated pipe.



Fasteners, chains: stainless steel.



Ropes: steel fibre reinforced, braided PP rope, threaded endings. Plastic, injection moulded PA knots.



Window: colourless PS, diameter 36 cm.

Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en