
TECHNICAL DATA SHEET

DIP STATION


FLTE020

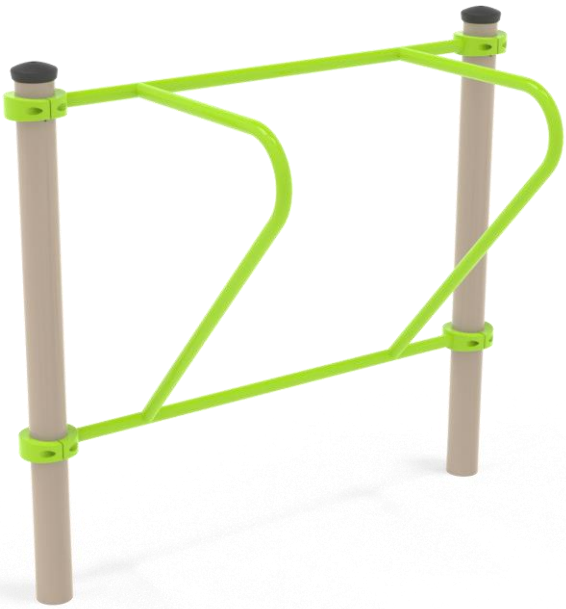

MAIN PARAMETERS


Dimensions	143 x 65 x 108 - 138 cm
Safety area	443 x 365 cm
Safety area (m^2)	16,1 m^2
Free fall height (HIC)	100 - 120 cm
Recommended height of users	min. 140 cm
Recommended number of users	1 person
Complies with Standards	EN 16630:2015


MUSCLE GROUPS

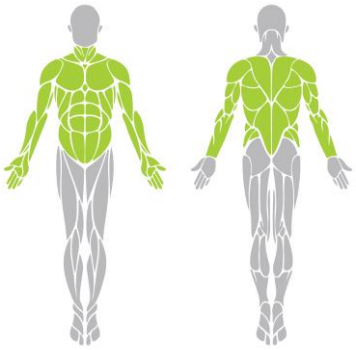

DIP STATION

FLTE020

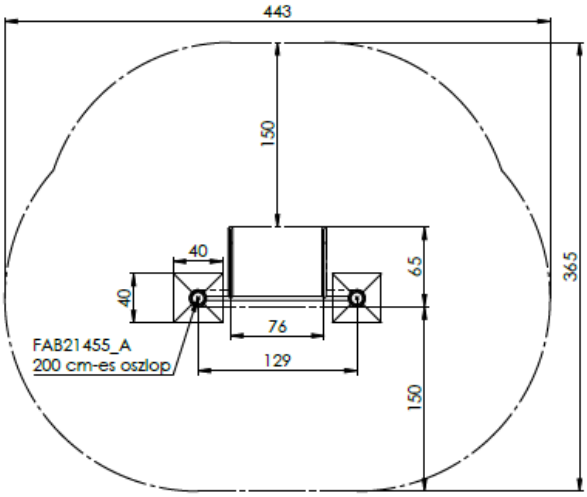

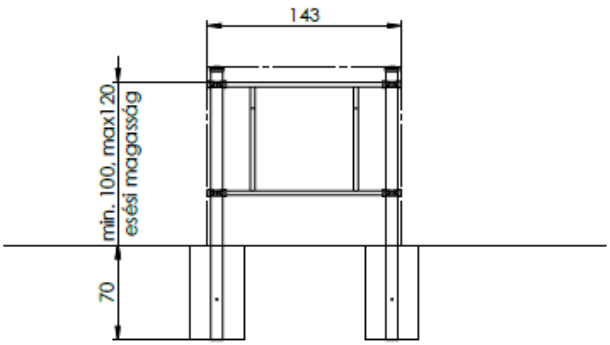

MATERIAL USAGE



Construction: ⌀ 88,9 mm, S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).Covered by plastic (PA6) cap



Connector: panels, bars - welded metal pipe clamp (Q235). Construction: ⌀ 88,9 mm, stainless steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer)



Metal structure: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Fasteners: galvanized and/or stainless steel.