TECHNICAL DATA SHEET

SLANTED PUSH UP STATION


FLTE034



MAIN PARAMETERS

Dimensions	109 x 103 x 132 cm
Safety area	403 x 406 cm
Safety area (m^2)	16,3 m^2
Free fall height (HIC)	102 cm
Recommended height of users	min. 140 cm
Recommended number of users	1 person
Complies with Standards	EN 16630:2015


MUSCLE GROUPS

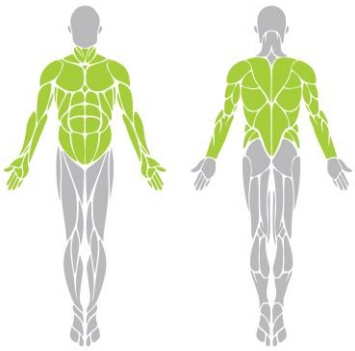

TECHNICAL DATA SHEET

SLANTED PUSH UP STATION

FLTE034

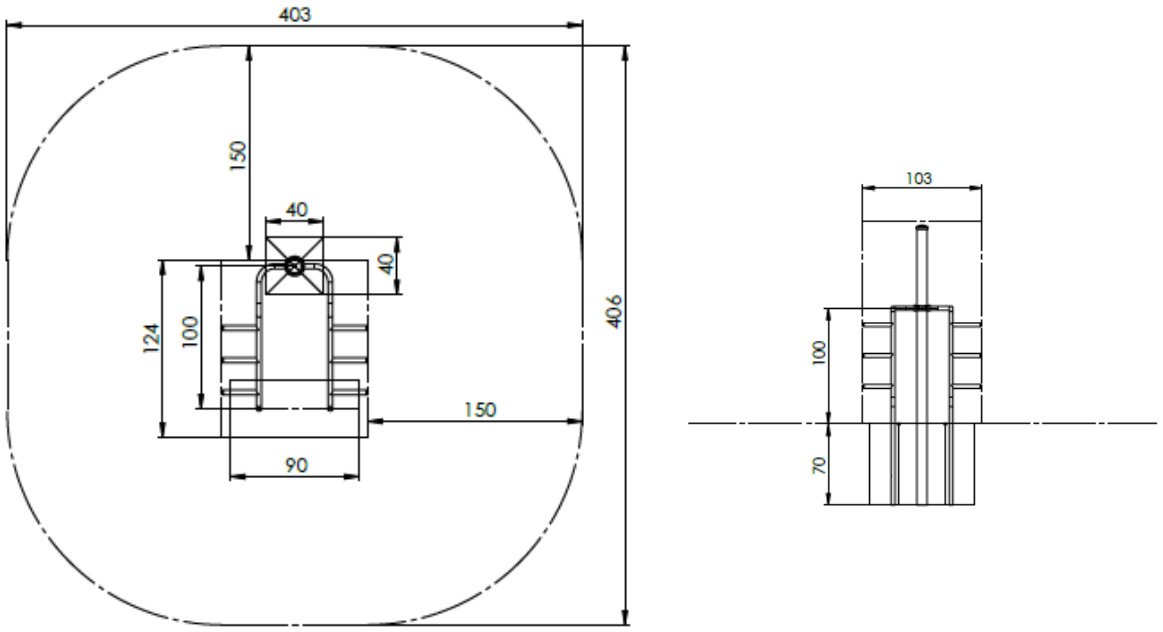

MATERIAL USAGE



Bars, ladders, fireman's poles, metal structure: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Construction: ⌀ 88,9 mm, S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).Covered by plastic (PA6) cap



Fasteners: galvanized and/or stainless steel



Connector: panels, bars - welded metal pipe clamp (Q235). Construction: ⌀ 88,9 mm, stainless steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer)