TECHNICAK DATA SHEET

COMBINED PULL UP BAR


FLTE041



MAIN PARAMETERS

Dimensions	143 x 43 x 208-258 cm
Safety area	438 x 344 cm
Safety area (m^2)	15,06 m2
Free fall height (HIC)	100-150 cm
Recommended height of users	min. 140 cm
Recommended number of users	1 person
Complies with Standards	EN 16630:2015


MUSCLE GROUPS

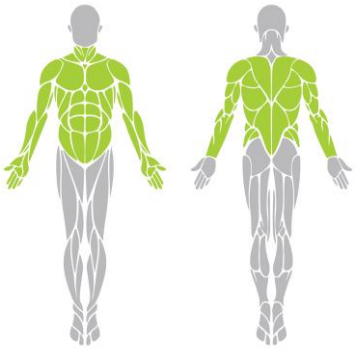


TECHNICAK DATA SHEET

COMBINED PULL UP BAR

FLTE041

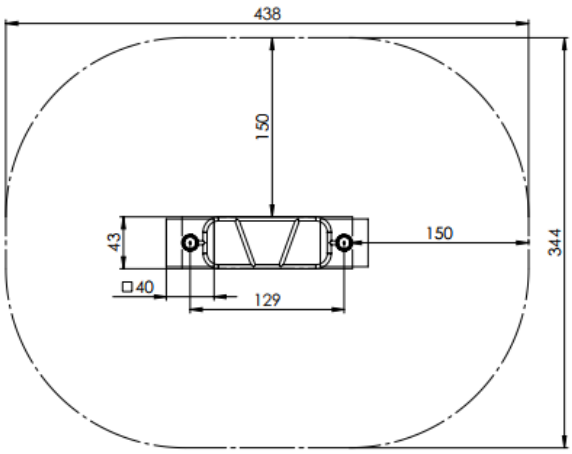

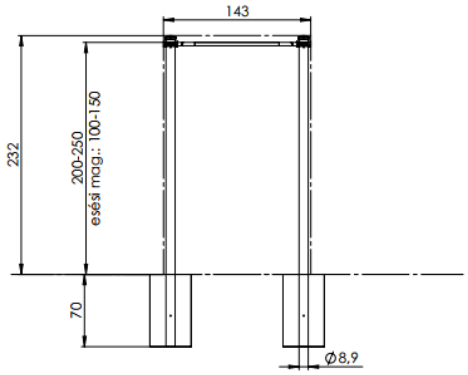

MATERIAL USAGE



Construction: ⌀ 88,9 mm, S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).Covered by plastic (PA6) cap



Fasteners: galvanized and/or stainless steel



Bars, ladders, fireman's poles, metal structure: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Connector: panels, bars - welded metal pipe clamp (Q235). Construction: ⌀ 88,9 mm, stainless steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer)