TECHNICAL DATA SHEET

ROOFED STREET WORKOUT


FLTE112



MAIN PARAMETERS

Dimensions	624 x 624 x 352 cm
Safety area	919 x 727 cm
Safety area (m^2)	40,09 m^2
Free fall height (HIC)	222 cm
Recommended height of users	min. 140 cm
Recommended number of users	8 persone
Complies with Standards	EN 16630:2015

MUSCLE GROUPS

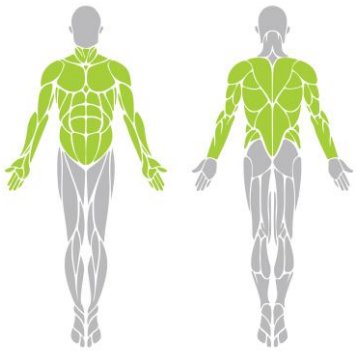



Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en

TECHNICAL DATA SHEET

ROOFED STREET WORKOUT

FLTE112

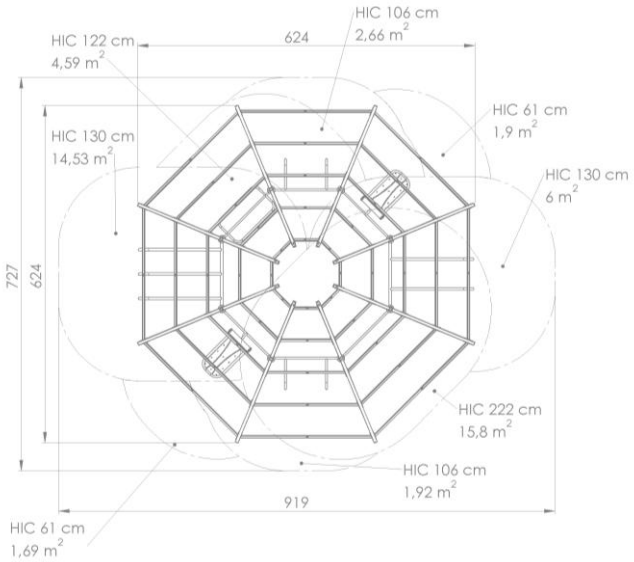

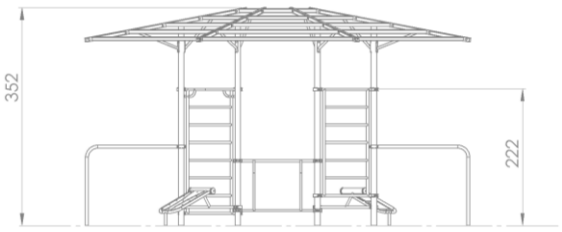

MATERIAL USAGE



Construction: ⌀ 88,9 mm, S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).Covered by plastic (PA6) cap.



Connector: panels, bars - welded metal pipe clamp (Q235). Construction: ⌀ 88,9 mm, stainless steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).




Metal structure: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).




Fasteners: galvanized and/or stainless steel.



Connection points: 15 mm, contour milled, UV resistant HDPE plate.



Construction: 80 x 80/ 40 x 20 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Roof: 10 mm thick, UV-resistant, multiwall polycarbonate sheet.

Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en