TECHNICAL DATA SHEET

ECO TWO-TOWERED PLAY CASTLE 1200 – WITH STAINLESS STEEL SLIDE

FLFJ014



MAIN PARAMETERS

Dimensions	277 x 257 x 300 cm
Safety area	601 x 535 cm
Safety area (m^2)	24 m^2
Free fall height (HIC)	120 cm
Recommended age group	3-10 years
Recommended number of users	6 persons
Complies with Standards	EN 1176-1 EN 1176-3
Platform area	0,8 m^2
Slide platform height	120 cm

FUNCTIONS

Tower	2 pcs
Slide	1 pc
Climbing wall	1 pc
Ladder	1 pc
Tunnel	1 pc




SLIDING HIDING INTERACTION CRAWLING CLIMBING


Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en

TECHNICAL DATA SHEET

ECO TWO-TOWERED PLAY CASTLE 1200 – WITH STAINLESS STEEL SLIDE

FLFJ014

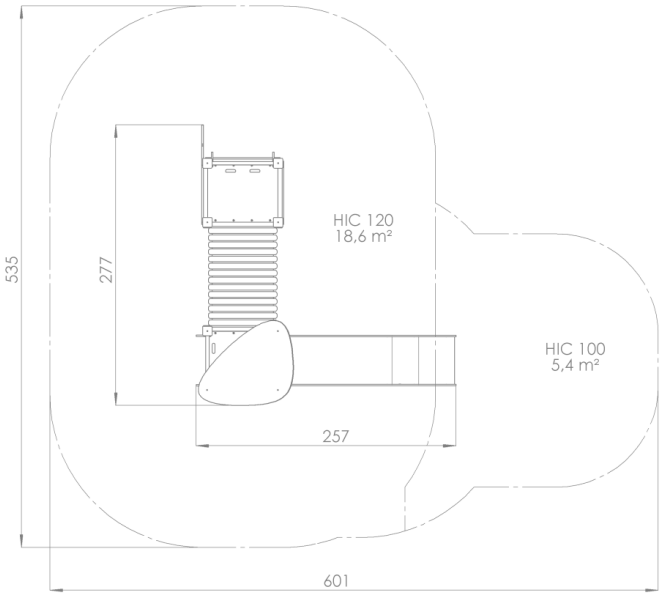


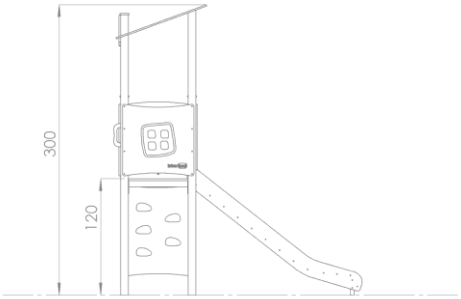

MATERIAL USAGE

HIC 120 cm	18,6 m^2
HIC 100 cm	5,4 m^2
HIC in Total	24 m^2

MATERIAL USAGE



Construction: 80 x 80 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Bars, ladders: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).




Side panels, rooftops, decorative items: 15 mm, contour milled, UV resistant HDPE plate.



Platforms: 21 mm anti-slip birch plywood.



Slide: Stainless steel sliding surface, 15 mm UV-resistant HDPE sheet side panels



Tunnel: plastic (PP D 600 SN8) corrugated pipe.



Fasteners: stainless steel.

Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en