TECHNICAL DATA SHEET

ECO TOWER SWING 2 – WITH POLYESTER SLIDE

FLFJ020P



MAIN PARAMETERS

Dimensions	498 x 311 x 325 cm
Safety area	830 x 598 cm
Safety area (m^2)	39,1 m^2
Free fall height (HIC)	150 cm
Recommended age group	3-14 years
Recommended number of users	5 person
Complies with Standards	EN 1176-1 EN 1176-2 EN 1176-3
Platform area	0,5 m^2
Slide platform height	150 cm

FUNCTIONS

Tower	1 pc
Slide	1 pc
Climbing wall	1 pc
Standard swing	2 pc




SLIDING CLIMBING INTERACTION SWINGING


Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en

TECHNICAL DATA SHEET

ECO TOWER SWING 2 – WITH POLYESTER SLIDE

FLFJ020P

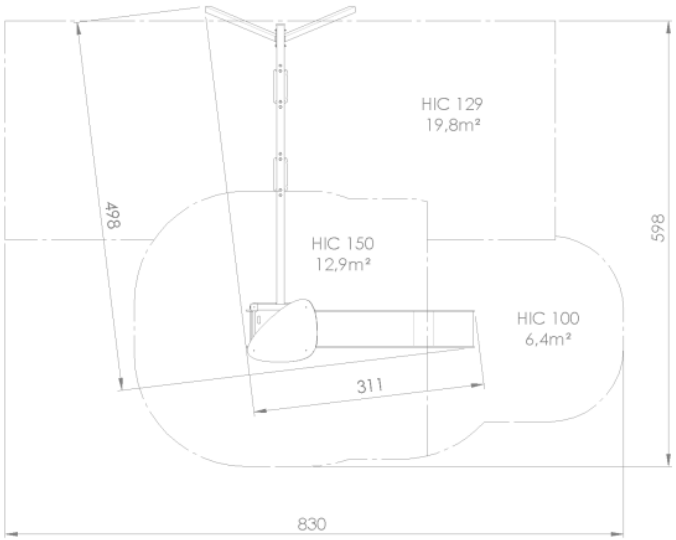


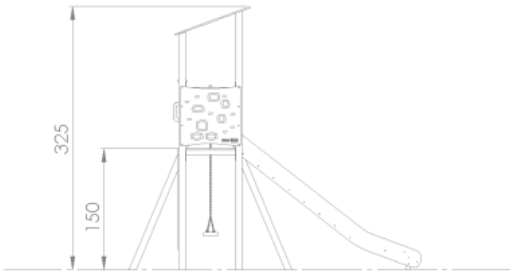

SAFETY AREA

HIC 150 cm	12,9 m^2
HIC 129 cm	19,8 m^2
HIC 100 cm	6,4 m^2
HIC in Total	39,1 m^2

MATERIAL USAGE



Construction: 80 x 80 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Bars: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



Side panels, rooftops, decorative items: 15 mm, contour milled, UV resistant HDPE plate.



Fasteners, chains: stainless steel.



Platforms: 21 mm anti-slip birch plywood



Swing seat: TPE rubber baby seat / swing seat, aluminium insert plate.



Slide: Polyester sliding surface, 15 mm UV-resistant HDPE sheet side panels

Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en