TECHNICAL DATA SHEET

EMBANKMENT SLIDE- WITH POLYESTER SLIDE

FLFJ044P



MAIN PARAMETERS

Dimensions	254 x 68 x 98 cm
Falling space	604 x 366 cm
Falling space area (m^2)	18 m^2
Free fall height (HIC)	100 cm
Recommended age group	2-12 years
Recommended number of users	2 person
Complies with Standards	EN 1176-1 EN 1176-3
Platform area	0,44 m^2

FUNCTIONS

Slide	1 pc



INTERACTION



SLIDING




CLIMBING


Email: sales@faberland.hu Mobile: +36/ 70-723-23-26 www.faberland.hu/en

TECHNICAL DATA SHEET

EMBANKMENT SLIDE- WITH POLYESTER SLIDE

FLFJ044P

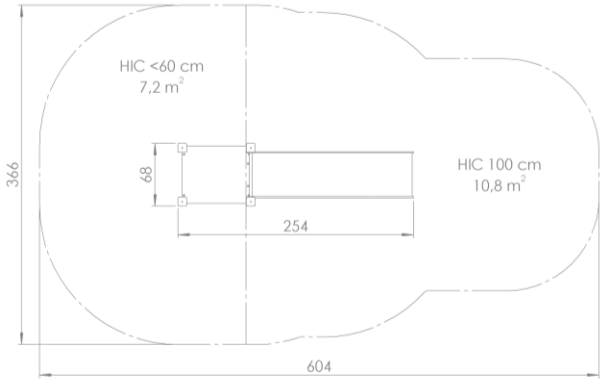


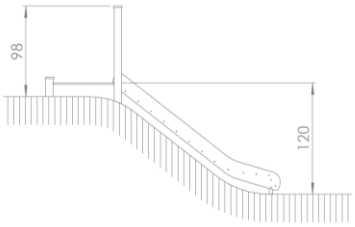


SAFETY AREA

HIC 100 cm	10,8 m²
HIC <60 cm	7,2 m²
HIC in Total	18 m²

MATERIAL USAGE



Construction: 80 x 80 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers PE powder coating (60-70 µm per layer).



Platform: 16 mm, UV resistant, anti-slip HPL plate.



Bar: S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers PE powder coating (60-70 µm per layer).



Fasteners: stainless steel.



Slide: glass fibre reinforced polyester sliding surface, 15 mm, UV resistant HDPE plate side panels